



Factory Installed Cable Connectors

D2H	Application	Pin Out	Max. Temp.	Compatible Cables
2 Socket, MIL with Backshell	Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206, CB802, CB806, CB810, CB811

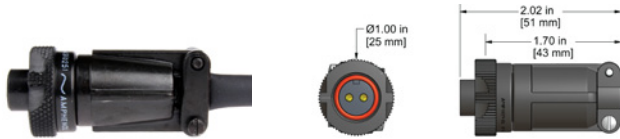


IP64

D3H	Application	Pin Out	Max. Temp.	Compatible Cables
3 Socket, MIL with Backshell	Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB212, CB218, CB812, CB818

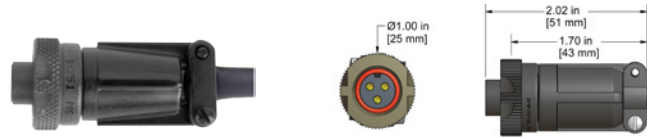

IP64


D2J	Application	Pin Out	Max. Temp.	Compatible Cables
2 Socket, MIL with Backshell	Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	350° F (177° C)	CB102, CB111, CB202, CB206, CB802, CB806, CB811

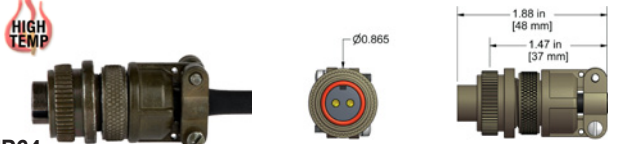

IP64

D2M	Application	Pin Out	Max. Temp.	Compatible Cables
2 Socket, MIL with Backshell	Permanent Mount	A = Signal (+) B = Common (-)	212° F (100° C)	CB502, CB506, CB511


With Hydraulic Hose Armor

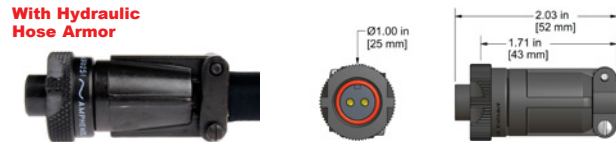

IP64

D3M	Application	Pin Out	Max. Temp.	Compatible Cables
3 Socket, MIL with Backshell	Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+) White	212° F (100° C)	CB512


With Hydraulic Hose Armor

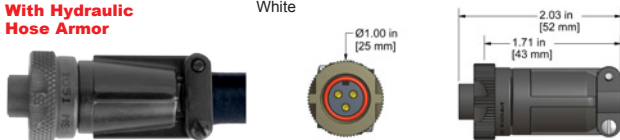

IP64


D2Q	Application	Pin Out	Max. Temp.	Compatible Cables
2 Socket, MIL with Backshell	Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB190, CB206

For Class I, Division 2

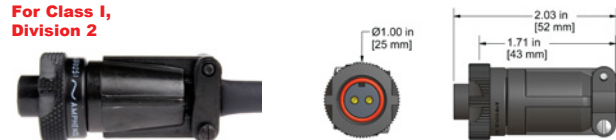

IP64


E	Application	Pin Out	Max. Temp.	Compatible Cables
BNC Jack, Molded Poly-carbonate Molded	Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

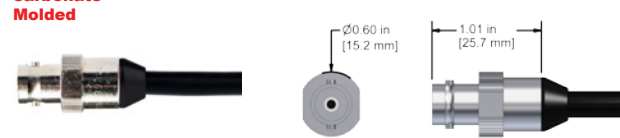


EMPP	Application	Pin Out	Max. Temp.	Compatible Cables
BNC Measurement Point with Protector	Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB202, CB206, CB802, CB806, CB810, CB811



EX	Application	Pin Out	Max. Temp.	Compatible Cables
BNC Jack Epoxyed	Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206



E2C	Application	Pin Out	Max. Temp.	Compatible Cables
2 BNC Jacks to 1 Multi-Conductor Cable	Portable Measurements	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB112



* Complete Technical Drawing Available on Page 125

