

# MH103-1B

Flat Surface Magnet Mounting Base, 40 lbs. Pull Strength, 1" (25.4 mm) OD, 0.42" (10.67 mm) Height, 1/4-28 Integral Mounting Stud




VIBRATION ANALYSIS HARDWARE



## Product Features

- ▶ Durable 17-4 Stainless Steel case and mounting stud
- ▶ High Strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Maximum frequency response up to 10 kHz when paired with MH133-1A mounting target

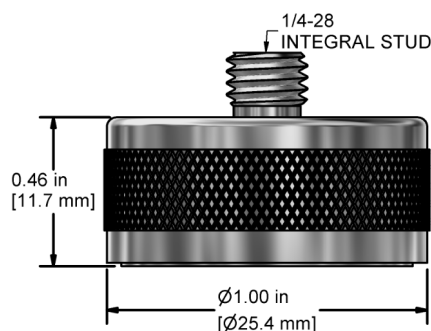

## Specifications

|                 |                                         |
|-----------------|-----------------------------------------|
| Max Temperature | 266°F (130°C)                           |
| Case Material   | 17-4 Stainless Steel                    |
| Magnet Material | Neodymium Iron Boron                    |
| Dimensions      | 1.00" (25 mm) OD, .46" (11.7 mm) Height |
| Pull Strength   | 40 lbs. (23 kg)                         |
| Sensor Mounting | 1/4-28 Integral Stud                    |

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all top exit sensors with 1/4-28 mounting holes

## Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900