
MANUAL GREASE GUNS

Flexigun®

A classic Macnaught grease gun, the FLEXIGUN® incorporates a unique variable stroke piston and valve arrangement for true 'one handed' operation and can produce increased pressure through short strokes or high volume shot using a full stroke.



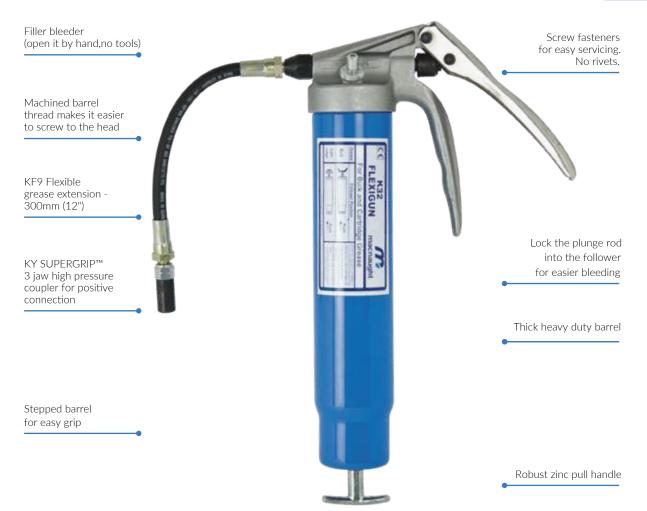

	K32-01	K29-01	K29-01-11 (Zinc)	
KY SUPERGRIP™ coupler	✓	✓	✓	
Fully serviceable	\checkmark	\checkmark	\checkmark	
Flex extension	300mm	300mm	300mm	
Typical output pressure range*	34 450 – 68 900 kPa (5000 – 10000psi)			
Output volume per shot	0.68g/0.02oz	0.68g/0.02oz	0.68g/0.02oz	
Cartridge	400g/14oz	450g/16oz	450g/16oz	
Bulk fillable	\checkmark	\checkmark	\checkmark	
Max grease type	NLGI No.2	NLGI No.2	NLGI No.2	
Warranty ¹	10 years	10 years	10 years	
Parts guarantee	10 years	10 years	10 years	

K29-12	FGK1-02			
K29-01 FLEXIGUN	K32-01 FLEXIGUN			
Robust blow moulded case				
Spare KY SUPERGRIP	Spare KY SUPERGRIP			
450g grease cartridge	KIN hypodermic injector needle coupler			
	KZDXL straight needle point coupler			
	KDR right angle coupler			

Applications:

Agriculture, Automotive, Transport, Mining, Industrial, Trucks and Buses, Construction

*Output pressure is a product of input force provided by the operator. NoteSubject to Macnaught warranty terms and conditions, see inside back cover. Note Parts available for 10 years from deletion or upgrade of model.



Levergun™ Designed for high pressure, high volume greasing, this lever action grease gun can easily clear blocked or damaged grease nipples. Lock the plunge rod into the follower for easier bleeding KY SUPERGRIP™ 3 jaw high pressure coupler for positive connection Stepped barrel for easy grip Robust zinc pull handle Machined barrel thread makes it easier to screw to the head Screw fasteners for easy servicing. No rivets. Thick heavy duty barrel K45-01-11 (Zinc) K40-01 K45-01 **KY SUPERGRIP™** coupler 1 1 **Fully serviceable** Included Extensions 150mm/6" rigid & 300mm/12" flexible Typical output pressure range* 48 300 - 82 750 kPa (7000 - 12000psi) Output volume per shot 1.5g/0.05oz 1.5g/0.05oz 1.5g/0.05oz Cartridge 400g/14oz 450g/16oz 450g/16oz Bulk fillable 1 1 1 Max grease type NLGI No.2 NLGI No.2 NLGI No.2 Warranty¹ 10 years 10 years 10 years 10 years 10 years Parts guarantee² 10 years *Output pressure is a product of input force provided by the operator.

Note1 Subject to Macnaught warranty terms and conditions, see inside back cover.

J3-01 Grease transfer pump

An economical solution for refilling most standard grease guns from larger bulk pails. The standard J3 fills Macnaught's range of hand, air powered guns and mini-lube KT5 and KT6 containers.

	J3-01	
J65 bulk fill nozzle	✓	6
Fully serviceable	✓	
Extension	Rigid	
Suits pail size	20kg/44Lb	
Output volume	54g/2oz per stroke	
Max grease type	NLGI No.2	
Warranty ¹	10 years	-

Note¹ Subject to Macnaught warranty terms and conditions, see inside back cover. Note² Parts available for 10 years from deletion or upgrade of model.